

# SAFETY

## When It Matters Most



This natural rubber glove is ideal in protecting against a variety of chemicals and cleaning agents including acids, alkalis and alcohols. This is an unlined rubber glove available in different lengths (44cm, 60cm and 66cm) and thickness (1.1mm and 1.5mm) allowing our customers to choose the appropriate level of protection for the job in hand. Its anatomical shape and flexibility minimise hand fatigue, and it has a smooth surface which prevents tackiness and allow for easy donning.

### Application:

- Chemical handling
- Heavy Machinery
- Sandblasting
- Agriculture
- Fishing



# Industrial Long Black Gloves

Product Code	Sizes	Palm width, A, mm (± 5mm)	Length, B, mm (± 10mm)	Cuff width, C, mm (± 5mm)
HN60KUB-CX-N17	10	125	440	220
HN60KUB-CX-N24	11	135	610	290
HN60KUB-CX-N26			660	305
<b>Thickness, mm</b>			1.50 – 1.80	

## Description:


- Industrial protective gloves
- 100% unlined natural rubber gloves.
- Smooth finish & chlorinated.

## Compliance:

- Manufactured in accordance with ISO 9001:2015 (reg. AR-1196) & ISO 14001:2015 (reg. ER-0856)
- In compliance with the standards EN 420 – General requirements
- CE certification for PPE Regulation 2016/425 – Category III in progress

## Physical Performance

- EN 388 – Mechanical Risks
  - Abrasion - 3
  - Cut - 1
  - Tear - 3
  - Puncture - 4
- EN 374 - Protective Gloves against Chemicals & Micro-organisms
  - Methanol, A Level 6
  - Sodium Hydroxide 40%, K Level 6
  - Sulphuric Acid 96%, L Level 6

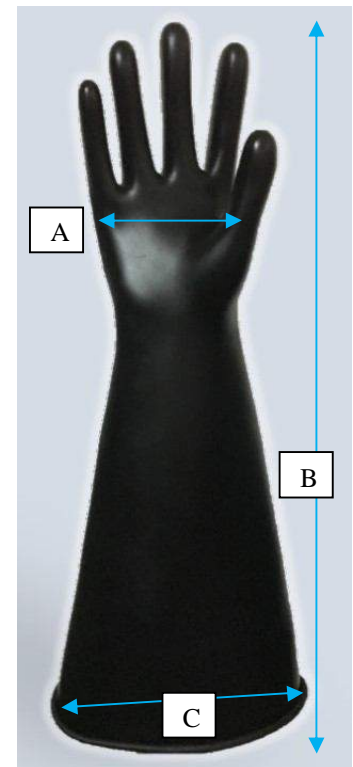

## Benefits:

- Excellent tensile strength and modulus.
- Beaded cuff prevents droplets flowing beyond the glove
- Added length for better protection of the forearms
- Ideal for use where heavy duty protection is essential.

## Applications:

- Agriculture
- Chemical handling
- Heavy duty handling; plant & heavy equipment maintenance

## Not recommended for:

Gloves will deteriorate after prolonged contact with solvents (e.g. kerosene, benzene, corn oil, toluene)

## Special Storage Condition:

Avoid contact with direct sunlight  
Store at 15°C to 40°C

(ALL INFORMATION ARE SUBJECT TO CHANGE FOR PRODUCT IMPROVEMENTS)

EFFECTIVE DATE: 15.08.2018

QA-S32

REVISION: A